




Recess Punches
& Fastener Tooling



**REG
ELLEN
MACHINE TOOL CORP.**

2135 Kishwaukee St.


Rockford, IL. 61104

(815) 964-0099

Fax: (815) 964-0482

www.regellen.com

Two Piece Recess Punch Pin & Holders

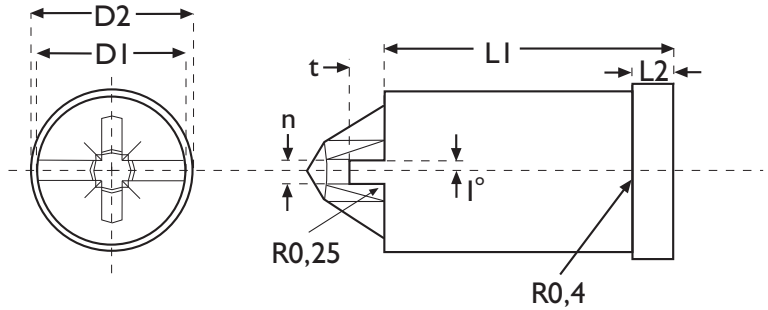

PIN No.	D1	D2	L1	L2	RECESS SIZE	PENETRATION MAX	T MAX	N MAX
M3.0	5.1	5.5	25.4	3.18	1	2.0	1.15	0.80
M3.5	5.6	6.0	25.4	3.18	2	2.2	1.25	0.90
M4.0	6.5	7.0	25.4	3.18	2	2.32	1.50	1.10
M5.0	8.0	8.5	25.4	3.18	2	3.1	1.80	1.30
M6.0	9.2	9.5	25.4	3.18	3	3.3	3.30	1.70

Specials & Pin Holders made to customer order.

When ordering add suffix:


H for Phillips

Z for 1A/Pozidriv®

XV for Supadriv®



Two Piece Recess Punch Pin & Holders

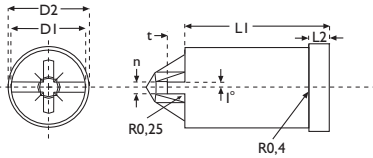


Special order form.

Please photocopy and use for your special pin requirements.

FEATURE	SIZE	TOLERANCE
Recess Type		N/A
Recess Size		N/A
Penetration		+0 -0.076
D1		+0 -0.0127
D2		+0 -0.076
L1		+0 -0.076
L2		+0.05 -0.05
n		+0 -0.05
t		+0 -0.05
Pin Identification No.		

Two Piece Recess Punch Pin & Holders

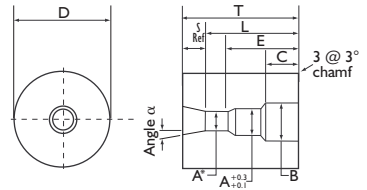

**Special order form.
Please photocopy and use for your
special holder requirements.**

FEATURE	SIZE	TOLERANCE MET.
Holder Identification No.		N/A
Pin No.		N/A
A		+0 -0.012
B		+0.3 -0.1
C		+0.1 -0
D		±0.012
E		±0.25
L		±0.05
S Ref		N/A
T		+0 -0.1
α°		±0.5°



Tooling International Ltd. Unit 8, Speedwell Trading Estate,
102 Kings Road Tyseley, Birmingham, England B11 2AT.

Tel: +44 (0) 121 771 0611 Fax: +44 (0) 121 773 6588
Web: www.tooling-international.co.uk Email: til@enterprise.net

**REG
ELLEN**
MACHINE TOOL CORP.

Phone: 815-964-0099

Fax: 815-964-0482

E-mail: sales@regellen.com

Web: www.regellen.com

